
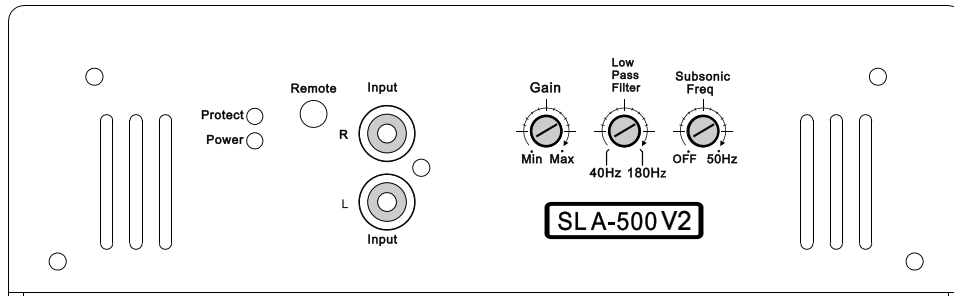


SL-A500 V2

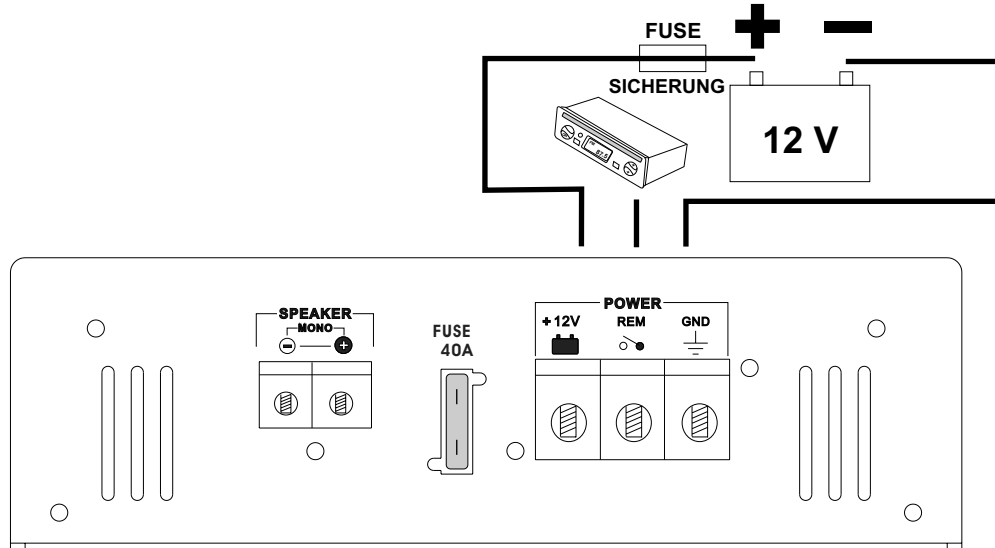

Maximum Power @ 2 Ohm = 800 Watt

Maximum Power @ 4 Ohm = 500 Watt

Maximum Power @ 8 Ohm = 300 Watt

450 Watt @ 2 Ohm THD + N < 3%

250 Watt @ 4 Ohm THD + N < 2%

150 Watt @ 8 Ohm THD + N < 2%

RMS power measures: 14.4 Volt DC

Input sensitivity low level: 200mVrms ~ 5.0 Vrms

THD+N S/N Ratio: > 100dB A-Weighted

Frequency response: 10 Hz - 500 Hz

Lowpass: 40 - 180 Hz / 18dB

Subsonic: 0 - 50 Hz variable / 24 dB

Dimensions: 195 x 235 x 60 mm